


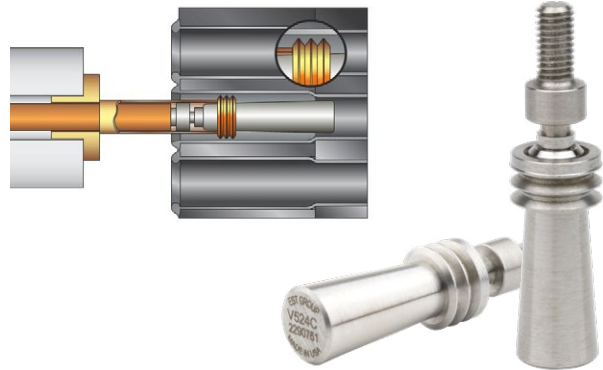

Pop-A-Plug® CPI/Perma Tube Plugs

Safe & Reliable Solution to Seal Leaking
Heat Exchanger & Condenser Tubes

Key Features

- Eliminates welding and/or explosives
- Simple hydraulic installation significantly reduces turnaround/down time
- Provides Helium leak tight seal to 1×10^{-6} cc/sec
- Recommended repair method per ASME PCC-2 (Article 312)*
- Metal to metal seal will not leak or degrade like elastomer plugs
- Lowest lifecycle cost compared to alternative tube plugging methods
- 24/7 Emergency manufacturing available

Technical Documents

- [DC1220 - Pop-a-Plug CPI/Perma Near End Installation Procedure](#)
- [DC4015 - Pop-a-Plug CPI/Perma Through-the-Tube Installation Procedure](#)

Resistant to thermal cycling and able to provide a seal that's helium-leak tight, Pop-A-Plug CPI/Perma Tube Plugs are the safe, effective, and reliable solution for heat exchanger tube leaks. Pop-A-Plug CPI/Perma Tube Plugs are rated to 1000 PsiG (68.9 BarG), and install in minutes. Their broad expansion range fits multiple gauges reducing inventory and costs. Controlled and repeatable installation minimizes installer fatigue and protects against damage to tubesheet ligaments and adjacent tubesheet joints, extending the life of heat exchangers and reducing costs for retubing. Kits include ten (10) plugs and one (1) Go/No-Go Gage.

Pressure Rating

- Up to 1000 PsiG (68.9 BarG)
 - Higher pressures available upon request

Size Range

- 0.472" to 2.067" (11.99mm to 52.5mm) Tube ID
 - Larger/smaller sizes available upon request

Standard Materials

- Brass, Carbon Steel, 304/316 Stainless Steel, 70/30 CuNi, Titanium
 - Additional materials available, partial list below - contact Customer Service for full list request

Additional materials: Chromoly F9 & F11, AL6XN, SS 317L/321/347, SS 400 Series Alloys, SS 904L, SS 254 SMO, SS 20CB3/Alloy 20, Super Duplex SS, Inconel Alloys, Incoloy Alloys, Hastelloy Alloys, Nickel 200/201, Zirconium, Carbon Steel A350 LF2

* *Inspection and Repair of Shell and Tube Heat Exchangers, The American Society of Mechanical Engineers ([ASME](#)) PCC-2, Article 312.*



North, Central & South America

2701 Township Line Rd
Hatfield, PA 19440

T: (+1) 215.721.1100 | (+1) 1.800.355.7044
E: est-info@curtisswright.com

Europe, Middle East, Africa (EMEA)

Hoorn 312D, 2404 HL Alphen aan den Rijn
The Netherlands

T: (+31) 172.418841
E: est-emea@curtisswright.com

Asia

Singapore
T: (+65) 3158.5052
E: est-asia@curtisswright.com

Korea

+82.10.9279.7132
est-asia@curtisswright.com

valves.curtisswright.com/EST

Pop-A-Plug® CPI/Perma Heat Exchanger Tube Plugs

©2026 Curtiss-Wright - All rights reserved. Specifications are subject to change without notice. All trademarks are property of their respective owners. I MK0003_06.2026

