



OD GripTight® Test Plug

High Pressure Hydrostatic Testing of Pipe & Tubing

Key Features

- Simple spanner wrench installation
- Lightweight aluminum construction
- Patented design prevents damage to seals during installation
- One plug can be used for a range of pipe schedule sizes
- Metric pipe & tubing sizes available

Technical Documents

- [DC2514 - OD GripTight Test Plug Operating Instructions](#)
- [DC8051 - OD Griptight Test Plug Technical Specifications](#)

Test open or plain end pipe and tube by sealing pipe OD. Patented self-gripping, self-sealing design and reliable dual seal mechanism provides unparalleled speed and safety in hydrotesting. Durable construction; corrosion resistant aluminum body and hardened grippers.

Test Pressure


- Up to 5000 PsiG (345 BarG)*

Size Range

- 1/4" to 4" (DN8 to DN100)

Standard Seal Materials

- Urethane with Fluoroelastomer O-ring**

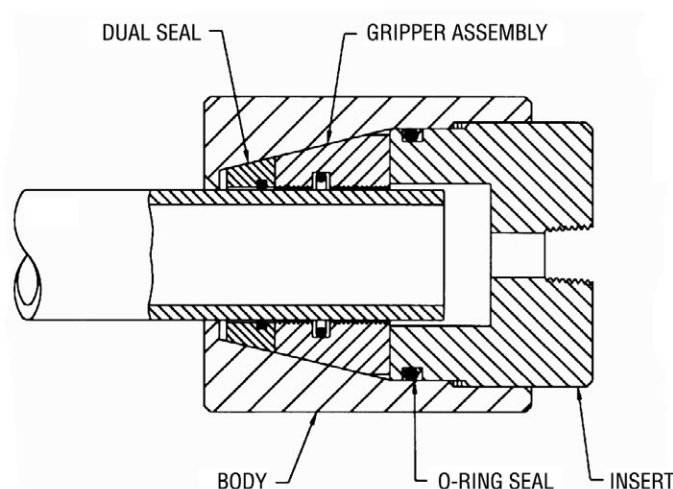

*Higher pressures available upon request.

**Alternate seal materials available including Neoprene, Fluoroelastomer, Silicone, EPDM, Natural Rubber, Nitrile Buna-N, and SBR Buna-S.



North, Central & South America

2701 Township Line Rd
Hatfield, PA 19440

T: (+1) 215.721.1100 | (+1) 1.800.355.7044
E: est-info@curtisswright.com

Europe, Middle East, Africa (EMEA)

Hoorn 312D, 2404 HL Alphen aan den Rijn
The Netherlands

T: (+31) 172.418841
E: est-emea@curtisswright.com

Asia

Singapore
T: (+65) 3158.5052
E: est-asia@curtisswright.com

Korea

+82.10.9279.7132
est-asia@curtisswright.com

valves.curtisswright.com/EST

GripTight® OD High Pressure Test Plug

©2026 Curtiss-Wright - All rights reserved. Specifications are subject to change without notice. All trademarks are property of their respective owners. | MK0031_06.2026

